


# PRODUCT BULLETIN

#17201

## 22EPS2P 22AWG Plenum Two-Pair Shielded Audio Cable

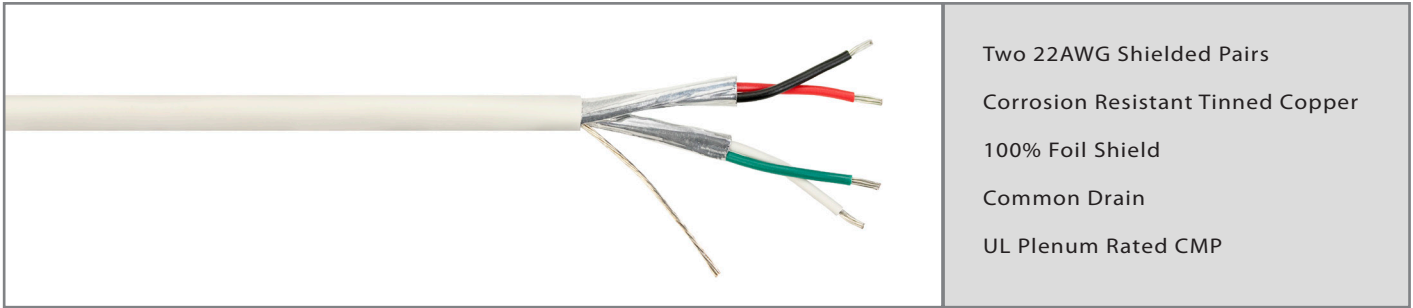


### Part Number Overview

Part Number: **22EPS2P**  
 Description: 22AWG Plenum Shielded Two-Pair Cable

### Materials & Dimensions

CONDUCTORS	(4) 22AWG (7 x 30) Stranded TC (cabled as two shielded pairs)
INSULATION	Plenum PVC .010" wall, (red & black, white & green)
SHIELD	100% Foil (per pair) with 24AWG (7 x 32) Stranded TC Drain Wire (drain wire is common for both shields)
JACKET	Flexible Plenum PVC, .162" O.D.
COLOR	White

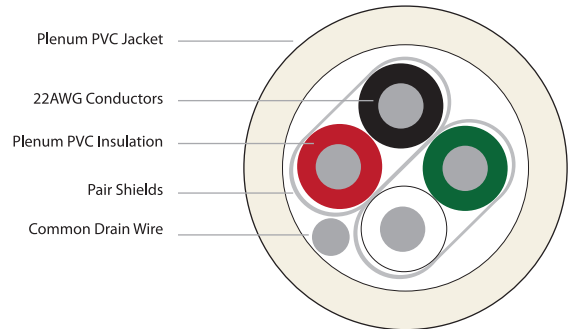

### Performance Characteristics

DC Resistance	Capacitance	Temperature Range	Weight	UL Listing
Conductor: 14.4 Ω/Mft Shield w/ Drain: 22.0 Ω/Mft	46.6 pF/ft between conductors	0 °C to 75 °C	20 lbs/Mft	CMP

Clark's 22EPS2P is a two-pair shielded cable for balanced audio, data or control applications. Each conductor is made from 22AWG tinned copper for low DCR, corrosion resistance and improved solder adhesion. The conductors are insulated with a plenum PVC dielectric that is easy-to-strip and terminate. UL plenum rated CMP, the 22EPS2P can be installed in a variety of permanent installation environments.