


## 400 Series

### 24 AWG Multi-Pair Audio Cable

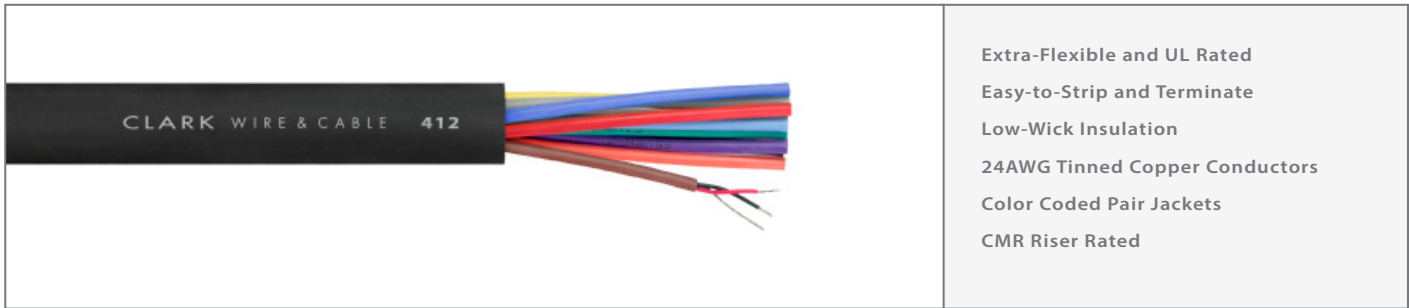


- Extra-Flexible and UL Rated
- Easy-to-Strip and Terminate
- Low-Wick Insulation
- 24AWG Tinned Copper Conductors
- Color Coded Pair Jackets
- CMR Riser Rated

Part Number: **4xx** (see below for variations)  
 Description: 24 AWG Multi-Pair Audio Snake Cables

#### Materials & Dimensions

Conductors	(2) 24AWG (7 x 32) Stranded TC (per pair)
Insulation	Polyethylene .009" wall, (one black, one red)
Shield	100% Alum/Mylar Foil w/ 24AWG (7 x 32) Stranded TC Drain Wire
Pair Jacket	PVC, .118" O.D. Color Coded (see chart #1)
Overall Jacket	Black TPE (see below for individual cable O.D.)

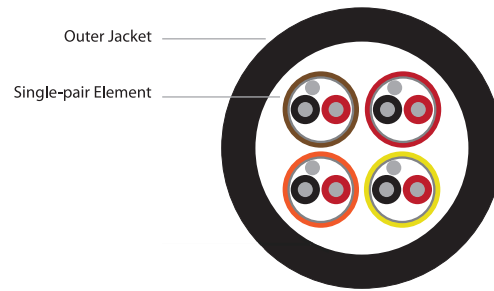

#### Performance Characteristics

DC Resistance	Capacitance	Temperature Range	UL Listing
Conductor: 23.5 Ω/Mft Shield w/ Drain: 23.5 Ω/Mft	24 pF/ft between conductors 43 pF/ft between one conductor and other in common with shield	-30 °C to 75°C	CMR

#### Product Variations

Part Number	Pair Count	Overall Diameter	Weight	Bend Radius
<b>404</b>	4 pair	.435"	100 lbs/Mft	4.3"
<b>408</b>	8 pair	.560"	175 lbs/Mft	5.6"
<b>412</b>	12 pair	.570"	200 lbs/Mft	5.7"

Clark's 400 series 24AWG multi-pair audio cables deliver multi-purpose performance for field, stage and permanent installation applications. Extra-flexible and easy-to-terminate, the 400 series is both installer and user friendly. The individual audio pairs are color coded and alphanumerically printed for easy identification. Conductors are tinned-copper and insulated with low-wick polyethylene insulation for easy solderability. UL rated and extra-flexible, the 400 series features Clark's unique TPE outer jacket compound that is flexible, abrasion resistant and CMR riser rated.