

# PRODUCT BULLETIN

#11301

## SPA22GSP Plenum 22AWG Single-Pair Audio Cable




- Easy-to-Strip Jacket
- Excellent Noise Rejection
- Corrosion Resistant Tinned Copper
- 100% Foil Shield w/ Drain Wire
- UL Plenum Rated CMP

### Part Number Overview

Part Number: **SPA22GSP**  
Description: Plenum 22AWG Single-Pair Audio Cable

### Materials & Dimensions

CONDUCTORS	(2) 22AWG (7 x 30) Stranded TC
INSULATION	FEP, .010" wall, (one white, one black)
SHIELD	100% Foil (bonded) with 24AWG (7 x 32) Stranded TC Drain Wire
JACKET	Plenum PVC, .132" O.D.
COLOR	Black

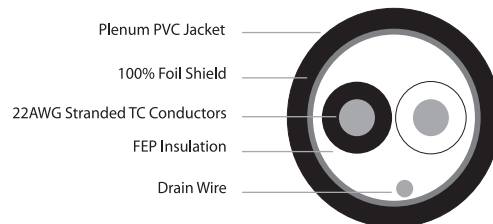

### Performance Characteristics

DC Resistance	Capacitance	Temperature Range	Weight	UL Listing
Conductor: 14.4 Ω/Mft Shield w/ Drain: 22.0 Ω/Mft	28.0 pF/ft between conductors 49.5 pF/ft between one conductor and other in common with shield	0 °C to 75 °C	12 lbs/Mft	CMP

Clark's SPA22GSP is a low-noise, single-pair audio cable for balanced line level or microphone applications. Easy to terminate, the SPA22GSP features several timesaving features, such as a bonded easy-strip shield and tinned copper conductors that streamline that cable termination process. Excellent common-mode and RF/EMI noise rejection are achieved by a precision twisted pair and 100% foil shield. UL rated CMP for plenum applications, the SPA22GSP can be installed in a variety of permanent installation environments.