

WB Series - Mini Enclosure

Features and Benefits

Mini Junction Box for Low Profile applications

Weather-Proof Stainless Steel or Powder Coated Steel for Indoor or Outdoor use

Fiber - ST, LC, SC, SMPTE 304M, opticalCON

Copper - BNC, XLR, RJ45, etherCON

Bottom Cut Out Allows Cable Attachment With Door Closed




Hinged panel for easy service access



WB Series	Material/ Color	Center Hole	Connector Option	Center Connector Qty	Top Hole	Connector Option	Top Connector Qty	Bottom Hole	Connector Option	Top Connector Qty	Handle Options	Cable Access Cutout		
X-WB		1			2			3						
Box Size	Box Material	Center Options			Top Options			Bottom Options			Handle / Lock		Cable Access	
12" x 10" x 8"	BLANK Powder Coated Steel	12 Max	B	Blank/NA	12 Max	B	Blank/NA	12 Max	B	Blank/NA	Blank* QTR turn lock QL Key Lock WL Wing knob lock WK Wing knob non-lock	Blank* Cutout Access NA No Cable Access Cutout		
	SS Stainless Steel		ST SM ST SC SM SC LC SM LC BN BNC	ST SM ST SC SM SC LC SM LC BN BNC		ST SM ST SC SM SC LC SM LC BN BNC								
			6 Max	XF XLR - Female XM XLR - Male RB Recessed BNC NE etherCON OCD opticalCON Duo OCQ opticalCON Quad			6 Max		XF XLR - Female XM XLR - Male NE etherCON					
			3 Max	PSC SMPTE Plug with SC PST SMPTE Plug with ST PLC SMPTE Plug with LC SSC SMPTE Socket with SC SST SMPTE Socket with ST SLC SMPTE Socket with LC										


Latch Options		
QTR turn slot	QL	WL
		

*Enclosure come standard with quarter turn latches, leaving handle option blank will default to this selection

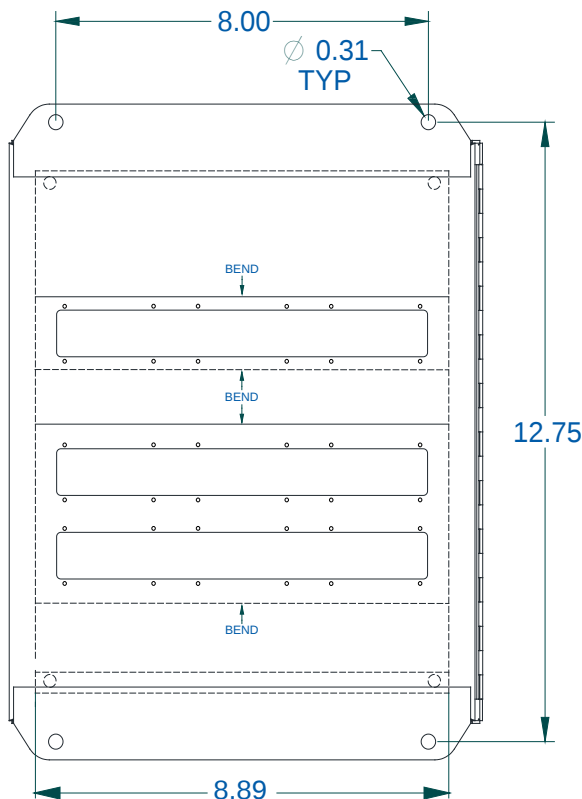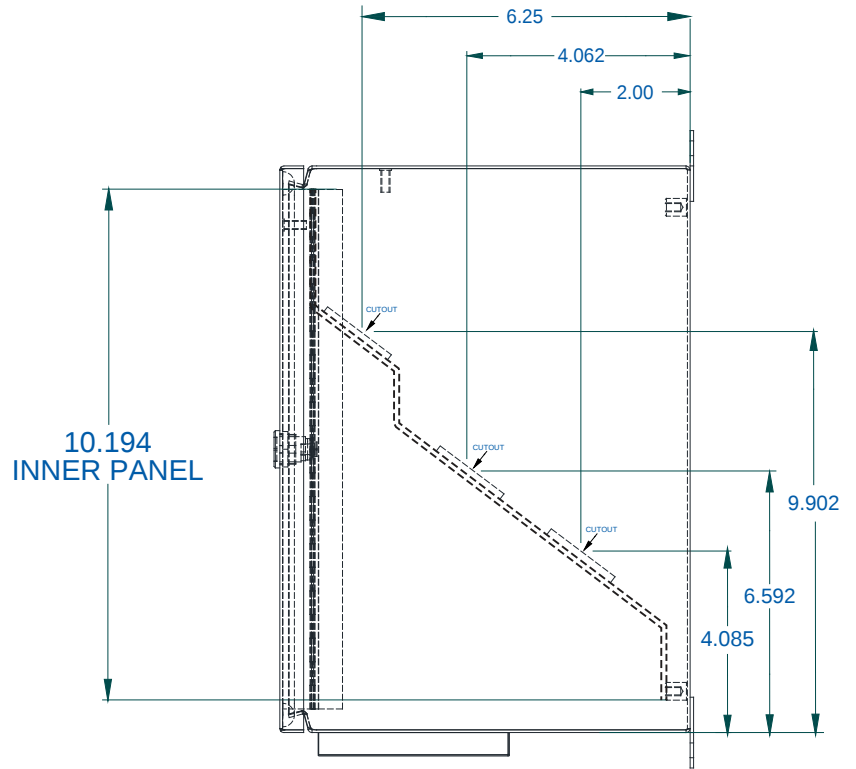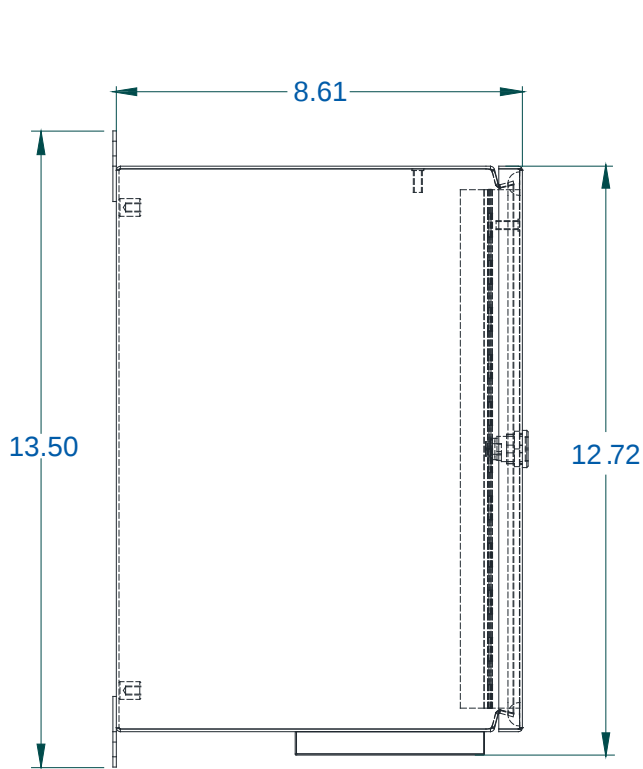


INSERT OPTIONS


BLANK

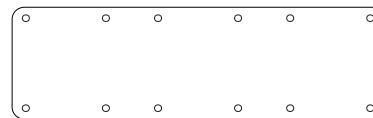


SMPTE

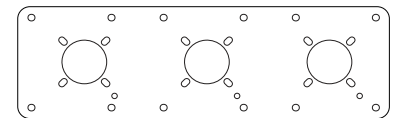


NEUTRIK D SERIES




LC DUPLEX / SC SIMPLEX



ST



SC DUPLEX

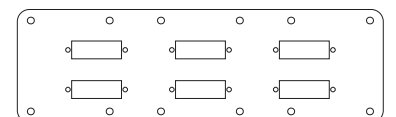

BNC

