


RF50LL

50Ω Low-Loss 9.5AWG Coaxial Cable

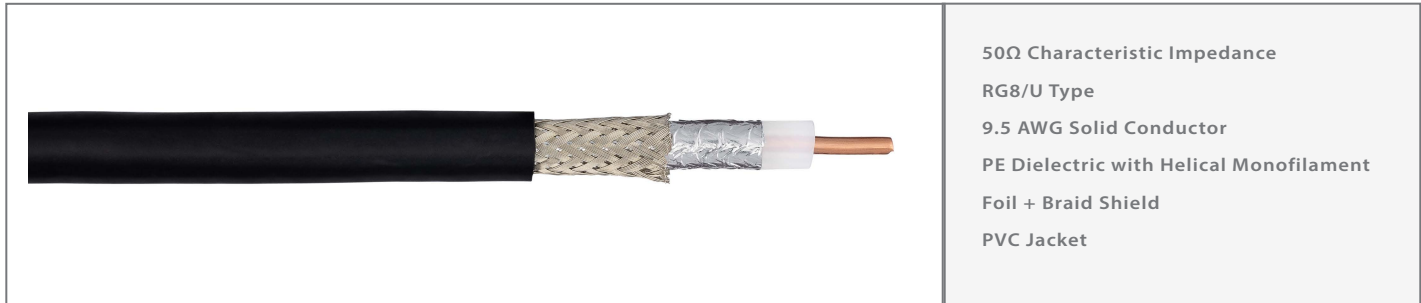

Materials & Dimensions

Center Conductor	9.5 AWG Solid BC .108" OD
Dielectric	Solid PE w/ helical monofilament wrap .285" OD
Shield	100% Foil & 88% TC Braid
Jacket	PVC
Overall Diameter	.405"
Available Colors	Black

Performance Characteristics

Impedance	Attenuation	DC Resistance	Capacitance	Vel. of Prop.	Bend Radius	Weight
50Ω	0.9 db/100ft @ 50MHz 1.8 db/100ft @ 200MHz 4.5 db/100ft @ 1000MHz 11.0 db/100ft @ 4000MHz	Conductor: 0.9 Ω/kft	24 pF/ft	84%	4.0" min.	103 lbs/Mft