


FOP-9 Breakout Series Splice Cables

Pre-terminated 900-micron buffered fiber optic pigtail

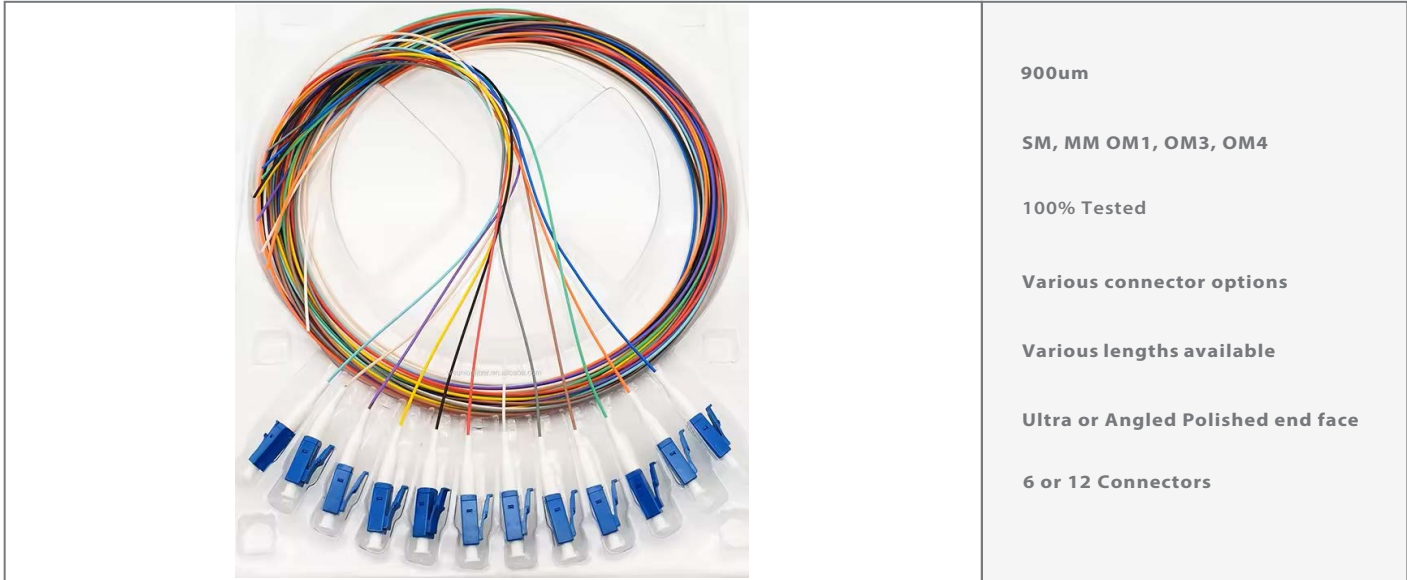

900um

SM, MM OM1, OM3, OM4

100% Tested

Various connector options

Various lengths available

Ultra or Angled Polished end face

6 or 12 Connectors

Part Number: **FOP-9(connector)QTY(Fiber-Mode)-Length**

Description: **Pre-terminated 900-micron buffered fiber optic pigtail**

Options:

Connector Options:

LC = LC UPC
SC = SC UPC
SCA = SC APC
ST = ST UPC
FC = FC UPC
FCA = FC APC

Connector Quantity Options:

6 = 006 12 = 012

Length: Given in Meters

0.5 meter, 1 meter, 3 meters

Fiber mode

MM = OM1
MM3 = OM3
MM4 = OM4
SM = Single-mode OS2

Connector Color: SM: Blue

APC: Green MM: Biege

Performance Characteristics

	Single mode:	Multi mode:	Connector Quantity and Color Code:	Temperature Range
Insertion Loss:	<0.2dB	<0.3dB	Quantity (6) - 1. Blue 2. Orange 3. Green 4. Brown 5. Grey 6. White	Operating temperature: -40°C to 75°
Return Loss:	>60dB(APC)	>35dB	Quantity (12) - 1. Blue 2. Orange 3. Green 4. Brown 5. Grey 6. White 7. Red 8. Black 9. Yellow 10. Violet 11. Pink 12. Turquoise	Storage Temperature: -40°C to 85°