


CV5058

50Ω Thin Profile 20AWG Coaxial Cable

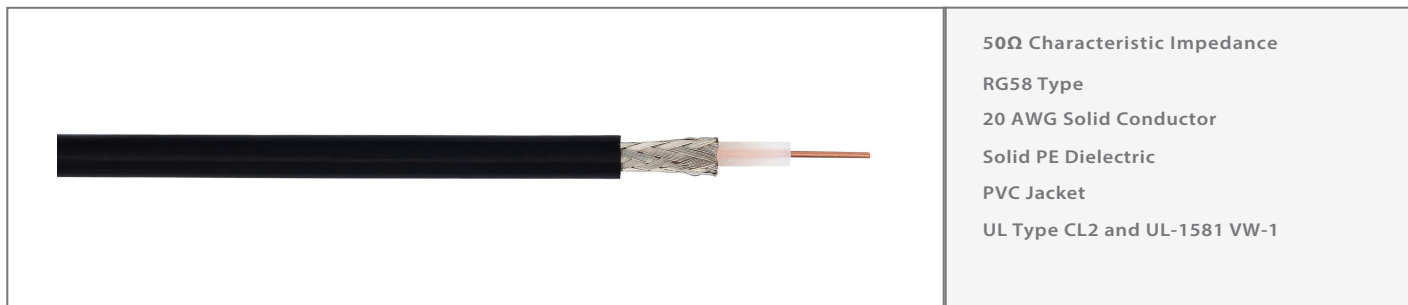

Materials & Dimensions

Center Conductor	20 AWG Solid BC .031" OD
Dielectric	Solid PE .114" OD
Shield	95% TC Braid
Jacket	PVC
Overall Diameter	.196"
Available Colors	Black

Performance Characteristics

Impedance	Attenuation	DC Resistance	Capacitance	Vel. of Prop.	Bend Radius	Operating Temperature	Weight	UL Listing
50Ω	3.0 db/100ft @ 50MHz 4.4 db/100ft @ 100MHz 6.0 db/100ft @ 200MHz 8.5 db/100ft @ 400MHz 13.0 db/100ft @ 900MHz	Conductor: 10.5 Ω/kft	29 pF/ft	66%	2.0" min.	60°C (max)	28 lbs/Mft	CL2 UL-1581 VW-1