


## FOP-9 Series Splice Cables

Pre-terminated 900-micron buffered fiber optic pigtail

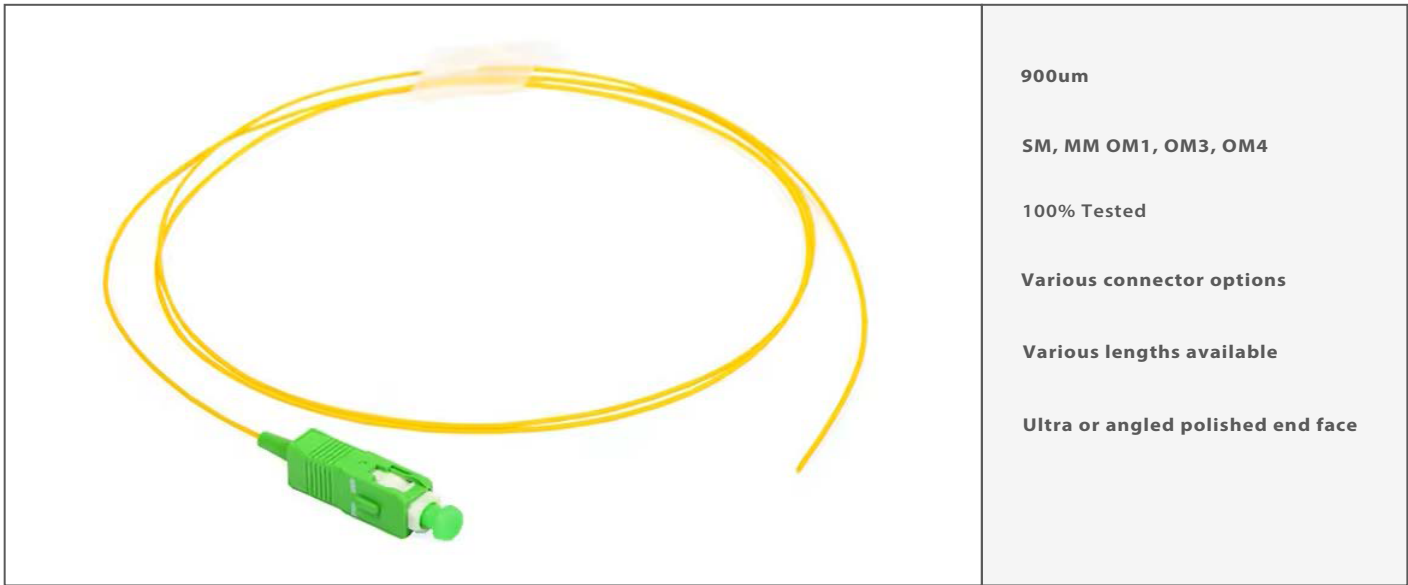

**900um**

**SM, MM OM1, OM3, OM4**

**100% Tested**

**Various connector options**

**Various lengths available**

**Ultra or angled polished end face**

Part Number: **FOP-9(connector)001-(Fiber-Mode)-(Length)**

Description: **Pre-terminated 900-micron buffered fiber optic pigtail**

Options:

**Connector Options:**

LC = LC UPC  
SC = SC UPC  
SCA = SC APC  
ST = ST UPC  
FC = FC UPC  
FCA = FC APC

**Fiber mode**

MM = 62.5um OM1  
MM3 = 50um OM3  
MM4 = 50um OM4  
SM = Single mode OS2

Length: Given in Meters

Performance Characteristics

Cable Performance	Single mode:	Multi mode:	Jacket Color:
<b>Insertion Loss</b>	<0.2dB	<0.3dB	Single-Mode: Yellow
<b>Return Loss</b>	>60dB(APC)	>35dB	OM1: Orange
			OM3-OM4: Aqua
Temperature Range	Operating temperature: -40°C to 75°	Storage Temperature: -40°C to 85°	<b>Connector Color:</b> SM: Blue APC: Green MM: Biege